

Pressure-sensitive adhesives

Acrylic Paper

26" X 20" BRIGHT WHITE GLOSS / PERMANENT / 80# SCOREBACK L-3

ITEM #SC-006

Facestock


A premium coated one side stock with outstanding ink receptivity and print characteristics. It also offers good flexibility and high internal strength for ease in converting. This face offers a 90% Brightness and an 88% opacity.

Type Paper		
Tensile MD 35 Lbs/in	Tensile CD 19 Lbs/in	
Tear MD 47 Grams	Tear CD 46 Grams	
Properties	Value	
Basis Weight	60 # Rm 25 x 38	
Caliper	3.20 Mil	
Opacity	88	
Brightness	90	
Regulatory Approval		
RoHS	Prop65	REACH
Yes	Yes	Yes
ТРСН	CPSIA	FSC
Yes	Yes	No

*Please contact your sales representative for details

Adhesive

A general purpose acrylic adhesive showing good initial tack with high shear and ultimate adhesion. It has good plasticizer, UV and solvent resistance. This adhesive displays excellent die-cutting and stripping characteristics and has good adhesion to many different substrates.

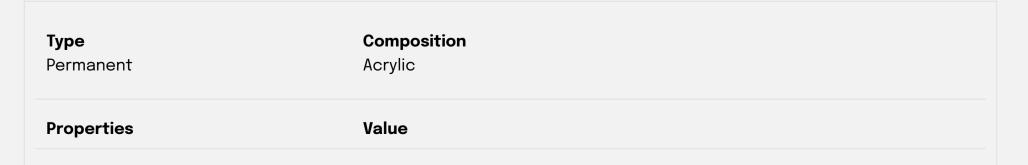

Glass	2.8 lbs/linear in.			
Polyethylene	1.5			
Regulatory Approval				
RoHS	Prop65	REACH		
Yes	Yes	Yes		
ТРСН	CPSIA	Direct Food		
Yes	Yes	Yes		
Indirect Food				
Yes				
*Please contact your sales representative for details				

Liner

This liner is clay-coated bleached kraft designed for roll-to-sheet applications. It is manufactured with scores every 1.25\" apart.

Type 9019084			
Tensile MD	Tensile CD		
36	21		
Tear MD	Tear CD		
61	71		
Description	Value		
Basis Weight	72		
Caliper	4.6		
Regulatory Approval			
RoHS	Prop65	REACH	
Yes	Yes	Yes	
ТРСН	CPSIA	UL	
Yes	Yes	No	
Direct Food			
No			

Last update: 05/01/2024

WARRANTY: All data obtained through ASTM standards and are typical and should not be used for specification purposes. Because of the variety of possible uses, the buyer should test the suitability of each intended use. The buyer assumes all risks in connection with such use. BEONTAG will not be liable for damages in excess of the purchase price of Products or for incidental or consequential damages.

BEONTAG warrants the products to be free from defects in material and workmanship. Should any failure to conform to this warranty appear within one year after the initial date of shipment (unless otherwise stated), BEONTAG shall, upon notification thereof and substantiation that the products have been stored and applied in accordance with BEONTAG'S standards, correct such defects by suitable repair or replacement without charge at BEONTAG's plant or at the location of the products (at BEONTAG's election); provided, however, if BEONTAG determines that repair or replacement is not commercially practical, BEONTAG shall issue a credit in favor of BUYER in an amount not to exceed the purchase price of the products

ADDRESS:

Beontag 6206 Wolf Creek Pike Trotwood, OH 45426 <u>800-358-4448</u> <u>orders.us@beontag.com</u>